

# Is Now Part of



# ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <a href="https://www.onsemi.com">www.onsemi.com</a>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, emplo



# FDS6680S

# 30V N-Channel PowerTrench® SyncFET™

## **General Description**


The FDS6680S is designed to replace a single SO-8 MOSFET and Schottky diode in synchronous DC:DC power supplies. This 30V MOSFET is designed to maximize power conversion efficiency, providing a low  $R_{\rm DS(ON)}$  and low gate charge. The FDS6680S includes an integrated Schottky diode using Fairchild's monolithic SyncFET technology. The performance of the FDS6680S as the low-side switch in a synchronous rectifier is indistinguishable from the performance of the FDS6680 in parallel with a Schottky diode.


# **Applications**

- DC/DC converter
- · Motor drives

### **Features**

- 11.5 A, 30 V.  $R_{DS(ON)} = 0.011 \Omega @ V_{GS} = 10 V$  $R_{DS(ON)} = 0.017 \Omega @ V_{GS} = 4.5 V$
- Includes SyncFET Schottky body diode
- Low gate charge (17nC typical)
- High performance trench technology for extremely low R<sub>DS(ON)</sub> and fast switching
- High power and current handling capability





Absolute Maximum Ratings T<sub>A</sub>=25°C unless otherwise noted

Symbol	Parameter		Ratings	Units
V <sub>DSS</sub>	Drain-Source Voltage		30	V
V <sub>GSS</sub>	Gate-Source Voltage		±20	V
I <sub>D</sub>	Drain Current - Continuous	(Note 1a)	11.5	А
	- Pulsed		50	
P <sub>D</sub>	Power Dissipation for Single Operation	(Note 1a)	2.5	W
		(Note 1b)	1.2	
		(Note 1c)	1	
$T_J$ , $T_{STG}$	Operating and Storage Junction Temperature Range		-55 to +150	°C

# **Thermal Characteristics**


$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	(Note 1a)	50	°C/W
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	(Note 1)	25	°C/W

**Package Marking and Ordering Information** 

Device Marking	Device	Reel Size	Tape width	Quantity
FDS6680S	FDS6680S	13"	12mm	2500 units

Symbol	Parameter	Test Conditions	Min	Тур	Max	Units
Off Char	acteristics					•
BV <sub>DSS</sub>	Drain-Source Breakdown Voltage	V <sub>GS</sub> = 0 V, I <sub>D</sub> = 1 mA	30			V
$\Delta BV_{DSS} \over \Delta T_{J}$	Breakdown Voltage Temperature Coefficient	I <sub>D</sub> = 1 mA, Referenced to 25°C		19		mV/°C
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	V <sub>DS</sub> = 24 V, V <sub>GS</sub> = 0 V			500	μА
I <sub>GSSF</sub>	Gate–Body Leakage, Forward	V <sub>GS</sub> = 20 V, V <sub>DS</sub> = 0 V			100	nA
I <sub>GSSR</sub>	Gate-Body Leakage, Reverse	$V_{GS} = -20 \text{ V},  V_{DS} = 0 \text{ V}$			-100	nA
On Char	acteristics (Note 2)					
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}$ , $I_D = 1 \text{ mA}$	1	2	3	V
$\frac{\Delta V_{GS(th)}}{\Delta T_J}$	Gate Threshold Voltage Temperature Coefficient	I <sub>D</sub> = 1 mA, Referenced to 25°C		-3.3		mV/°C
$R_{DS(on)}$	Static Drain–Source On–Resistance	$\begin{aligned} &V_{GS} = 10 \text{ V}, &I_{D} = 11.5 \text{ A} \\ &V_{GS} = 4.5 \text{ V}, &I_{D} = 9.5 \text{ A} \\ &V_{GS} = 10 \text{ V}, I_{D} = 11.5 \text{A}, T_{J} = 125 ^{\circ}\text{C} \end{aligned}$		9.5 13.5 17	11 17 23	mΩ
I <sub>D(on)</sub>	On-State Drain Current	V <sub>GS</sub> = 10 V, V <sub>DS</sub> = 5 V	50			Α
<b>g</b> <sub>FS</sub>	Forward Transconductance	$V_{DS} = 15 \text{ V}, \qquad I_{D} = 11.5 \text{ A}$		27		S
Dynamic	Characteristics	•				
C <sub>iss</sub>	Input Capacitance	V <sub>DS</sub> = 15 V, V <sub>GS</sub> = 0 V,		2010		pF
C <sub>oss</sub>	Output Capacitance	f = 1.0 MHz		526		pF
C <sub>rss</sub>	Reverse Transfer Capacitance			186		pF
Switchin	g Characteristics (Note 2)					
t <sub>d(on)</sub>	Turn–On Delay Time	$V_{DS} = 15 \text{ V}, \qquad I_{D} = 1 \text{ A},$		10	18	ns
t <sub>r</sub>	Turn-On Rise Time	$V_{GS} = 10 \text{ V}, \qquad R_{GEN} = 6 \Omega$		10	18	ns
$t_{d(off)}$	Turn-Off Delay Time			34	55	ns
t <sub>f</sub>	Turn-Off Fall Time			14	23	ns
Qg	Total Gate Charge	$V_{DS} = 15 \text{ V}, \qquad I_{D} = 11.5 \text{ A},$		17	24	nC
Q <sub>gs</sub>	Gate-Source Charge	V <sub>GS</sub> = 5 V		6.2		nC
$Q_{gd}$	Gate-Drain Charge			5.5		nC
Drain-Se	ource Diode Characteristics	and Maximum Ratings				
Is	Maximum Continuous Drain-Source	Diode Forward Current			3.5	Α
$V_{SD}$	Drain–Source Diode Forward Voltage	$V_{GS} = 0 \text{ V},  I_S = 3.5 \text{ A}  \text{(Note 2)}$ $V_{GS} = 0 \text{ V},  I_S = 7 \text{ A}  \text{(Note 2)}$		0.45 0.6	0.7	V
t <sub>rr</sub>	Diode Reverse Recovery Time	I <sub>F</sub> = 11.5A,		20		nS
Qrr	Diode Reverse Recovery Charge	$d_{iF}/d_t = 300 \text{ A/}\mu\text{s}$ (Note 3)		19.7		nC

1. R<sub>8JA</sub> is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins.  $R_{\theta JC}$  is guaranteed by design while  $R_{\theta CA}$  is determined by the user's board design.



a) 50°/W when mounted on a 1 in² pad of 2 oz copper



b) 105°/W when mounted on a .04 in² pad of 2 oz copper



c) 125°/W when mounted on a minimum pad.

Scale 1:1 on letter size paper

- 2. Pulse Test: Pulse Width < 300 $\mu$ s, Duty Cycle < 2.0%
- 3. See "SyncFET Schottky body diode characteristics" below.

# **Typical Characteristics**





Figure 1. On-Region Characteristics.

Figure 2. On-Resistance Variation with Drain Current and Gate Voltage.







Figure 3. On-Resistance Variation with Temperature.

Figure 4. On-Resistance Variation with Gate-to-Source Voltage.







Figure 5. Transfer Characteristics.

Figure 6. Body Diode Forward Voltage Variation with Source Current and Temperature.

# Typical Characteristics (continued)







Figure 7. Gate Charge Characteristics.








Figure 9. Maximum Safe Operating Area.

Figure 10. Single Pulse Maximum Power Dissipation.

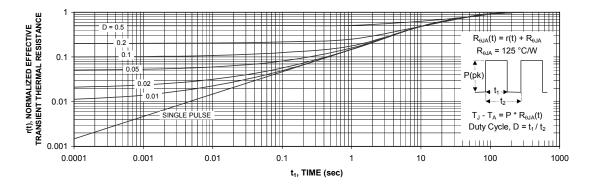


Figure 11. Transient Thermal Response Curve.

Thermal characterization performed using the conditions described in Note 1c. Transient thermal response will change depending on the circuit board design.

# Typical Characteristics (continued)

# SyncFET Schottky Body Diode Characteristics

Fairchild's SyncFET process embeds a Schottky diode in parallel with PowerTrench MOSFET. This diode exhibits similar characteristics to a discrete external Schottky diode in parallel with a MOSFET. Figure 12 shows the reverse recovery characteristic of the FDS6680S.




Figure 12. FDS6680S SyncFET body diode reverse recovery characteristic.

For comparison purposes, Figure 13 shows the reverse recovery characteristics of the body diode of an equivalent size MOSFET produced without SyncFET (FDS6680).




Figure 13. Non-SyncFET (FDS6680) body diode reverse recovery characteristic.

Schottky barrier diodes exhibit significant leakage at high temperature and high reverse voltage. This will increase the power in the device.




Figure 14. SyncFET body diode reverse leakage versus drain-source voltage and temperature.

### **TRADEMARKS**

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEX™ FASTr™ QFET™ VCX™

Bottomless™ GlobalOptoisolator™ QS™

CoolFET™ GTO™ QT Optoelectronics™

CROSSVOLT™ HiSeC™ Quiet Series™ DOME™ ISOPLANAR™ SuperSOT™-3 E<sup>2</sup>CMOS<sup>TM</sup> MICROWIRE™ SuperSOT™-6 OPTOLOGIC™ EnSigna™ SuperSOT™-8 FACT™ OPTOPLANAR™ SyncFET™ POP™ FACT Quiet Series™ TinyLogic™

FAST® PowerTrench® UHC™

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

### PRODUCT STATUS DEFINITIONS

#### **Definition of Terms**

Datasheet Identification	Product Status	Definition		
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.		
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.		
No Identification Needed Full Production		This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.		
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.		

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdt/Patent-Marking.pdf">www.onsemi.com/site/pdt/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

# **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FDS6680S FDS6680S\_D84Z