

isc Silicon NPN Power Transistor


2SD880

DESCRIPTION

- Collector-Emitter Breakdown Voltage-
: $V_{(BR)CEO} = 60V(\text{Min})$
- Low Collector-Emitter Saturation Voltage-
: $V_{CE(sat)} = 1.0V(\text{Max}) @ I_C = 3.0A$
- Complement to Type 2SB834

APPLICATIONS

- Designed for use in audio frequency power amplifier applications

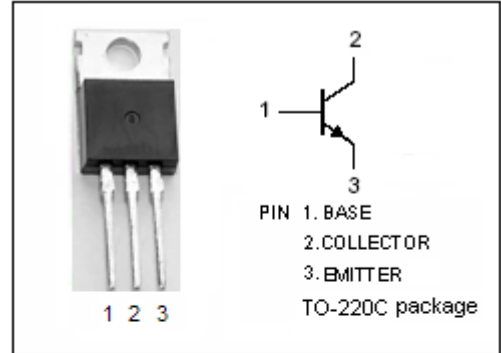


ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	60	V
V_{CEO}	Collector-Emitter Voltage	60	V
V_{EBO}	Emitter-Base Voltage	7	V
I_C	Collector Current-Continuous	3.0	A
I_{CM}	Collector Current-Peak	6.0	A
I_B	Base Current-Continuous	0.5	A
P_C	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	30	W
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-55~150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	4.16	$^\circ\text{C/W}$

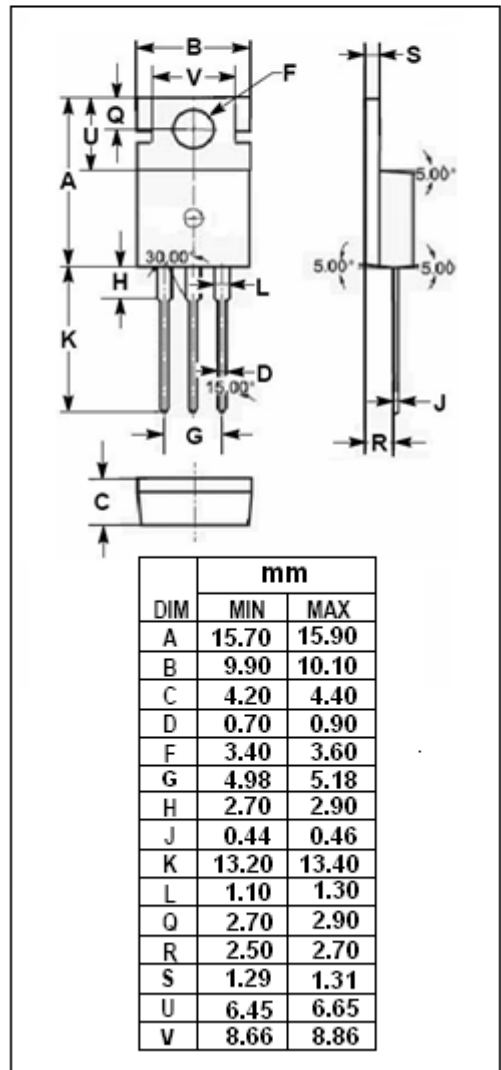

isc Silicon NPN Power Transistor

2SD880

ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C=50\text{mA}; I_B=0$	60			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	$I_E=1\text{mA}; I_C=0$	7			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=3.0\text{A}; I_B=300\text{mA}$			1.0	V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C=500\text{mA}; V_{CE}=5\text{V}$			1.0	V
I_{CBO}	Collector Cutoff Current	$V_{CB}=60\text{V}; I_E=0$			100	μA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=7\text{V}; I_C=0$			100	μA
h_{FE}	DC Current Gain	$I_C=500\text{mA}; V_{CE}=5\text{V}$	60		300	
f_T	Current-Gain—Bandwidth Product	$I_C=0.5\text{A}; V_{CE}=5\text{V}; f_{test}=1.0\text{MHz}$		3.0		MHz

Switching times

t_{on}	Turn-on Time	$I_C=2\text{A}, I_{B1}=-I_{B2}=200\text{mA}$ $P_W=20\mu\text{s}; V_{CC}=30\text{V}$			1.2	μs
t_{stg}	Storage Time				2.0	μs
t_f	Fall Time				1.1	μs

◆ h_{FE} Classifications

O	Y	GR
60-120	100-200	150-300

isc Silicon NPN Power Transistor

2SD880

